UIP
INTERNATIONAL

INDUSTRIAL & MARINE HOSE PRODUCTS

EXCEPTIONAL QUALITY | LARGE INVENTORY
SAME DAY SHIPPING
1.800.257.2467

INTERNATIONAL

Industrial hoses are critical system components and their purchase and supply should not be trusted to just anyone. UIP International hose products provide you with the safest and most dependable products available on the market. UIP supplies a variety of industrial hoses for a wide range of industries and applications.

Our Hose products are produced in accordance with the ISO 9001:2015 Quality Management System which ensures strict control of our products. Compliance inspections and audits are conducted throughout the year to ensure continuity and compliance with all requirements. This certification helps to ensure all our products are safe, reliable, and of excellent quality.

EXCEPTIONAL QUALITY
-
LARGE INVENTORY
-
SAME DAY SHIPPING
-
DEDICATED CUSTOMER SERVICE

INDUSTRIAL & MARINE
HOSE PRODUCTS

ISO 9001:2015 CERTIFIED

Where Quality is the Standard

FLUIDSEALING ASSOCIATION

NAHAD MEMBER HOSE SAFETY INSTITUTE.org

NAHAD MEMBER
THE ASSOCIATION FOR HOSE AND ACCESSORIES DISTRIBUTION

UL®

SAE INTERNATIONAL®

Table Of Contents

AIR / MULTI-PURPOSE HOSE

- SERIES 111 Oxygen Charging Air Hose.....6
- SERIES 112 Textile Reinforced Air Hose.....6
- SERIES 114 Textile/Wire Reinforced Air Hose.....7
- SERIES 142 Hot Air Blower Hose.....7
- SERIES 133 Red EPDM Multi- Purpose Air & Water Hose 200 psi.....8
- SERIES 135 Red Nitrile Multi-Purpose Air & Water Hose 300 psi.....8

CHEMICAL HOSE

- SERIES 422 Corrugated UHMW Chemical Hose.....9

PETROLEUM HOSE

- SERIES 226 Oil Discharge Hose.....10
- SERIES 230 Tank Truck Hose.....11
- SERIES 230HD Heavy Duty Tank Truck Hose.....11

WATER HOSE

- SERIES 618 Medium Duty Water Discharge Hose.....12
- SERIES 622 Water Suction & Discharge Hose.....12
- SERIES 624 Creamery & Paper Mill Wash Down Hose.....13

STEAM HOSE

- SERIES 536 High-Pressure Steam Hose.....14

MATERIAL HANDLING HOSE

- SERIES 333 Unalok Multi-Purpose Material Handling Hose.....15
- SERIES 333 Unalok Coupling and Gasket.....16
- SERIES 335 Sandblast Hose.....17
- SERIES 846 Concrete & Plaster Hose.....17
- SERIES 831 Dry Cement Hose.....18

SPECIAL APPLICATION HOSE

- SERIES 242 Hot Tar & Asphalt Hose.....19
- SERIES 313 Elephant Trunk Hose.....19
- SERIES 537 1-Ply Furnace Door Coolant Hose.....20
- SERIES 538 2-Ply Furnace Door Coolant Hose.....20

OFFSHORE OIL & SUBMARINE HOSE

- SERIES 297 Daytona Mainline Submarine Hose.....21
- SERIES 298 Daytona Tanker Rail Hose.....22
- SERIES 299 Daytona PLEM Hose.....22
- SERIES 902 Dredge Hose.....23

FDA FOOD GRADE / SANITARY HOSE

- SERIES 725 Brewers & Vintners Discharge Hose..... 24
- SERIES 155 SpringFlex Spring Wire Suction Hose..... 24
- SERIES 150 FDA Clear Low-Pressure PVC Tubing..... 25
- SERIES 162 FDA Polyester Reinforced Red Tracer PVC Tubing..... 26
- SERIES 163 FDA Polyester Reinforced Clear PVC Tubing..... 26
- SERIES 164 FDA Polyester Reinforced Blue Tracer PVC Tubing..... 26

MARINE HOSE

- SERIES M120 Bilge Pump Hose..... 27
- SERIES M141 FDA Clear PVC Lightweight Black Helix Hose..... 27
- SERIES M148 Smooth Flex FDA Sanitation Hose..... 28
- SERIES M149 FDA Live Well Hose..... 28
- SERIES M125 Electrical Conduit Hose..... 29
- SERIES M127 Crush-Resistant Sternflex Conduit Hose..... 29
- SERIES M350 A1 Fuel Hose..... 30
- SERIES M360 A2 Fuel Hose..... 30
- SERIES M110/200 Softwall Exhaust Hose..... 31
- SERIES M100/250 Hardwall Exhaust Hose..... 32
- SERIES M252 Corrugated Hardwall Exhaust..... 33
- SERIES BSIL SAEJ20 Straight Silicone Hose..... 34
- SERIES 720 Marine Hose Clamps..... 35

Oxygen Charging Hose Series 111

A premium air hose designed for lancing and scarfing in steel mills and foundries. High quality Neoprene rubber compounds stand up to tough, oily environments. The green Neoprene cover can be used to indicate color coding for oxygen and offers protection against sparks and abrasions. Made on stainless steel mandrels, no petroleum lubrications, ends capped at factory.

Construction:
Tube: Black Chloroprene
Reinforcement: Multiple Textile Plies
Cover: Green Neoprene
Standard Length: 100 feet
Temperature Rating: -30°F to +180°F (-35°C to +82°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.50	0.98	0.31	500	100'
0.75	1.30	0.48	500	100'
1.00	1.54	0.59	500	100'
1.25	1.79	0.71	500	100'
1.50	2.14	0.98	500	100'
2.00	2.67	1.25	500	100'
3.00	3.72	2.11	500	100'

Textile Reinforced Air Hose Series 112

Air Drill 300 Air Hose

A light and flexible, yet sufficiently rugged hose, made to withstand the abuse and hard service found in mining and construction. It has excellent resistance to abrasion, gouging and weathering. Specially designed for superior flexibility and kink resistance.

Construction:
Tube: Black synthetic rubber (oil mist resistant)
Reinforcement: Multiple Textile Plies
Cover: Yellow SBR/EPDM blend (abrasive and oil mist resistant)
Standard Length: 50 and 100 feet
Temperature Rating: -20°F to +180°F (-29°C to +82°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.75	1.20	0.41	300	50'/100'
1.00	1.44	0.55	300	50'/100'
1.25	1.75	0.79	300	50'/100'
1.50	1.97	0.94	300	50'/100'
2.00	2.52	1.41	300	50'/100'
2.50	3.18	1.62	300	50'/100'
3.00	3.62	2.21	300	50'/100'

Contractor's Wire Braid Air Hose Series 114

Heavy duty wire reinforced hose designed for the most severe service in mines, quarries, and heavy construction. The braided construction offers superior flexing without kinking and is excellent for compressor air applications. Tough ozone and abrasion resistant cover.

Construction:
Tube: Black Synthetic Compound (Oil Mist Resistant)
Reinforcement: One or multiple wire braids
Cover: Yellow Synthetic Compound
Standard Length: 100 feet
Temperature Rating: -20°F to +212°F (-29°C to +100°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.50	0.89	0.36	600	100'
0.75	1.14	0.62	600	100'
1.00	1.33	0.82	600	100'
1.25	1.69	1.08	600	100'
1.50	1.97	1.27	600	50'/100'
2.00	2.54	1.89	600	50'/100'
2.50	3.07	2.44	600	50'/100'
3.00	3.62	3.29	600	50'/100'

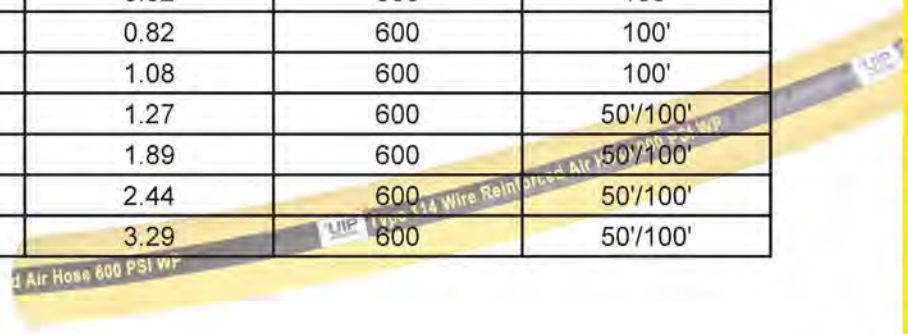

Hot Air Blower Hose Series 142

This hose is specifically designed to convey hot air at 350°F continuously in the process of loading/unloading dry materials in plants or transport vehicles. The hose transfers hot air from the compressor to the storage bin/cargo bay to propel bulk product. The specially formulated EPDM tube and cover offer excellent resistance to heat as well as to weather and ozone.

Construction:
Tube: Black EPDM
Reinforcement: Multiple textile spirals w/dual wire helix
Cover: Black heat-resistant EPDM
Standard Length: 100 feet
Temperature Rating: -40°F to +356°F (-40°C to +180°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
2	2.67	1.17	150	100'
3	3.46	1.97	150	100'
4	4.82	2.94	100	100'

Multi-Purpose 200 PSI Air & Water Hose Series 133

A tough, general service air and water hose suitable for use in general water discharge service, medium duty service for air, water and pneumatic tools, mines agriculture, and construction. It is abrasion and ozone resistant. 200 PSI

Construction:
Tube: EPDM Synthetic Rubber
Reinforcement: Spiral Textile
Cover: Red Anti-static Synthetic Rubber EPDM
Length: 100 feet
Temperature Rating: -40°F to +212°F (-40°C to +100°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
1/4	0.49	0.13	200	STOCK
3/8	0.68	0.23	200	STOCK
1/2	0.89	0.38	200	STOCK
5/8	1.00	0.44	200	STOCK
3/4	1.12	0.50	200	STOCK
1	1.44	0.80	200	STOCK

Multi-Purpose 300 PSI Air & Water Hose Series 135

A high-pressure, multi-purpose hose suitable for use in general water discharge services, medium duty service for air, water and pneumatic tools, mines, agriculture and construction. Synthetic cover resists oil and solvents and is abrasion and ozone resistant. It is ideal for the aluminum reduction industry as well as other industries where a high degree of electrical non-conductivity is required.

Construction:
Tube: Nitrile Synthetic Rubber
Reinforcement: Spiral Textile
Cover: Red Anti-static Synthetic Rubber
Length: 100 feet
Temperature Rating: -22° to 158°F

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
1/4	0.49	0.13	300	STOCK
3/8	0.68	0.23	300	STOCK
1/2	0.89	0.38	300	STOCK
5/8	1.00	0.44	300	STOCK
3/4	1.12	0.50	300	STOCK
1	1.44	0.80	300	STOCK

UHMW Corrugated Chemical Hose Series 422

The Ultra High Molecular Weight Polyethylene tube (UHMWPE) will handle 98% of the most common chemicals without leaching and contaminating the product being conveyed. (Refer to the chemical guide to determine compatibility with chemicals and applications.)

Construction:
Tube: UHMW Polyethylene
Reinforcement: Multiple textile plies with dual helix wire
Cover: Corrugated Green EPDM
Standard Length: 100 feet
Temperature Rating: -40°F to +212°F (-40°C to +100°C)
*250 PSI available upon request

I.D. (in.)	O.D. (in.)	Bend Radius (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.75	1.22	3.5	0.42	200	100'
1.00	1.46	4.0	0.48	200	100'
1.25	1.77	4.0	0.71	200	100'
1.50	2.01	5.0	0.81	200	100'
2.00	2.56	6.0	1.17	200	100'
2.50	3.11	8.0	1.70	200	100'
3.00	3.62	9.0	2.01	150	100'
4.00	4.65	10.0	2.75	150	100'

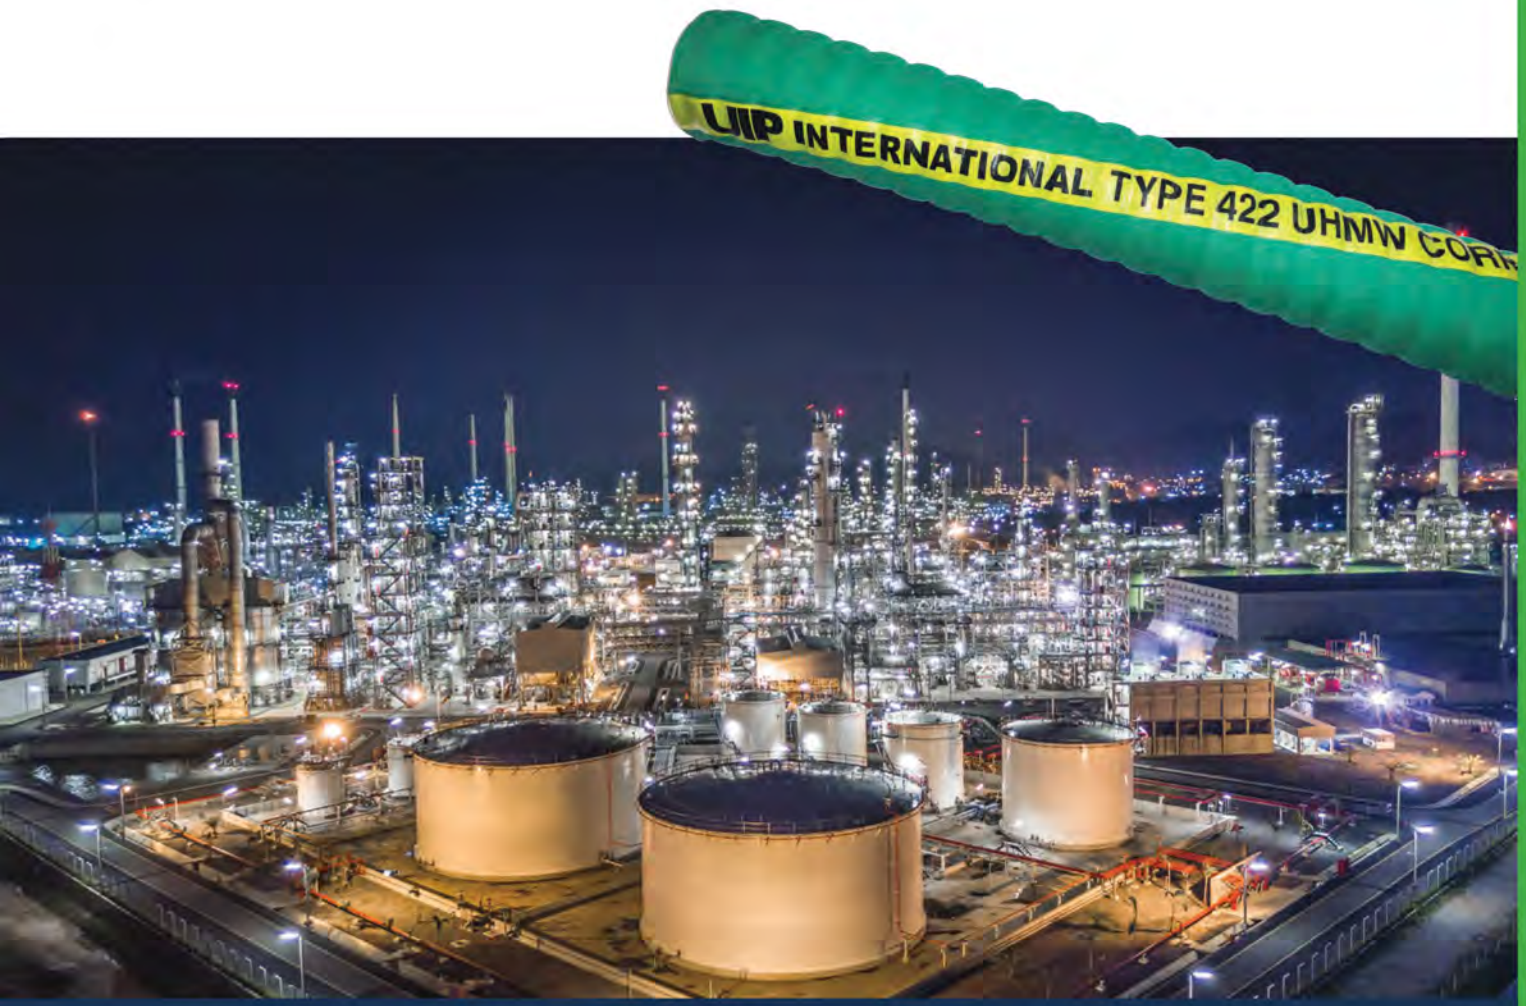

Oil Discharge Hose Series 226

A lightweight discharge hose designed to handle gasoline, oil, ethanol blends, and other petroleum based products up to 50% aromatic content.

Construction:
Tube: Black Nitrile (ARPM Class A ORS)
Reinforcement: Multiple textile plies w/static wire
Cover: Red Nitrile/PVC
Length: 100 feet
Temperature Rating: -30°F to +180°F (-34°C to +82°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
1.5"	1.97	0.72	150	100'
2"	2.5	0.93	150	100'
3"	3.50	1.40	150	100'
4"	4.66	2.35	150	100'

Tank Truck Hose Series 230

A suction and discharge hose designed for the transfer of petroleum products such as oils and refined fuels such as gasoline, diesel, ethanol blends, and other petroleum based products up to 50% aromatic content. The cover is resistant to oils, ozone, and abrasion.

Construction:
Tube: Black Nitrile (ARPM Class A ORS)
Reinforcement: Multiple textile plies with dual helix wire
Cover: Black Nitrile/PVC (weather & ozone resistant)
Standard Length: 100 feet, 6" & 8" 20 feet
Temperature Rating: -40°F to +180°F (-40°C to +82°C)

I.D. (in.)	O.D. (in.)	Bend Radius (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
1.00	1.38	2.5	0.43	150	100'
1.25	1.65	3.0	0.59	150	100'
1.50	1.93	4.0	0.78	150	100'
2.00	2.48	5.0	1.13	150	100'
2.50	2.99	6.0	1.54	150	100'
3.00	3.50	8.0	1.86	150	100'
4.00	4.57	12.0	2.62	150	100'
6.00	6.69	24.0	5.34	150	20'/100'
8.00	8.86	32.0	9.17	150	20'

Tank Truck Hose Series 230 HD

Designed for heavy-duty service in the transfer of petroleum products up to 50% aromatic, including gasoline, oil, diesel fuels, and ethanol blends. Ideal for applications where an extremely lightweight, flexible hose with a high working pressure and small bend radius is required.

Construction:
Tube: Black Nitrile (ARPM Class A ORS)
Reinforcement: Multiple textile plies w/ dual wire helix
Cover: Black Nitrile/PVC (weather & ozone resistant)
Standard Length: 100 feet
Temperature Rating: -40° to 180°F

I.D. (in.)	O.D. (in.)	Minimum Bend Radius (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
2	2.56	6.0	1.28	300	STOCK
3	3.58	9.0	2.25	300	STOCK
4	4.69	14.0	3.20	300	STOCK

Medium Duty Water Discharge Hose Series 618

Light, flexible, durable - and with 150 PSI working pressure in all sizes, this hose is the most versatile choice for many water discharge applications. Tube and cover are flexible EPDM rubber, resistant to weathering and to many light industrial and agricultural chemicals.

Construction:
Tube: Black SBR
Reinforcement: Multiple textile plies
Cover: Black SBR
Standard Length: 50 feet and 100 feet
Temperature Rating: -20° to 180°F

I.D. (in.)	O.D. (in.)	Plies	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
1-1/2	1.80	2	0.52	150	STOCK
2	2.32	2	1.08	150	STOCK
2.5	2.80	2	1.36	150	STOCK
3	3.33	2	1.59	150	STOCK
4	4.33	2	2.48	150	STOCK
6	6.34	2	4.29	150	STOCK
8	8.55	4	5.60	150	STOCK
10	10.55	4	6.22	150	STOCK
12	12.58	4	6.44	150	STOCK

Heavy Duty Water Suction & Discharge Hose Series 622

This water suction hose is designed to handle a wide range of applications in industry, construction, and agriculture. The tough, flexible EPDM rubber construction will resist abrasion, weathering and the effects of agricultural herbicides and other mild chemicals.
*Corrugated options available.

Construction:
Tube: Black SBR/EPDM blend
Reinforcement: Multiple textile plies with dual wire helix
Cover: Black SBR/EPDM blend
Standard Length: 100 feet; 8"-12" 20 feet
Temperature Rating: -20° to 180°F

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Bend Radius (in)	Stock Item or Min. Order
1.5	1.91	0.86	150	6.0	100'
2	2.46	1.24	150	7.0	100'
2.5	2.95	1.37	150	10.0	100'
3	3.49	2.11	150	14.0	100'
4	4.61	2.79	150	14.0	100'
6	6.57	6.04	150	30.0	100'
8	8.74	9.25	150	38.0	20'
10	10.87	10.86	150	50.0	20'
12	12.87	13.68	150	66.0	20'

Creamery & Paper Mill Wash Down Hose Series 624

Used for sanitary clean-up service in creameries, dairies, breweries, bottling plants, bakeries and meat packing plants. The non-marking cover is compounded to resist animal greases, fatty acids, alkalies and caustics. The SBR tube and cover are resistant to water absorption.
Available with built-in tapered no-marking nozzle.

Construction:
Tube: Black SBR
Reinforcement: Synthetic cord
Cover: White SBR
Length: 50 feet
Temperature Rating: -20° to 250°F

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.75	1.26	0.40	150	STOCK
1	1.49	0.46	150	STOCK
1.5	2.08	0.87	100	STOCK

Steam Hose Series 536

Designed for transferring steam for processing products and equipment cleaning. The rugged construction makes this hose an excellent choice for all around steam service in chemical plants, refineries, shipyards and demanding industrial service.

Construction:
Tube: Black EPDM
Reinforcement: Multiple wire braids
Cover: Perforated Black EPDM
Standard Length: 50 and 100 feet
Safety factor: 10:1
Temperature Rating: -40°F to +450°F (-40°C to +232°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.75	1.25	0.49	250	STOCK
1	1.50	0.84	250	STOCK
1.25	1.80	1.08	250	STOCK
1.5	2.12	1.21	250	STOCK
2	2.60	1.68	250	STOCK
2.5	3.22	2.30	250	STOCK
3	3.73	2.90	250	STOCK
4	4.80	4.33	250	STOCK

Unalok Hose Series 333

A flexible solution for a wide variety of material handling needs. Save time and money with our most versatile material handling hose, available in sizes up to 14" and in a variety of rubber tube compounds. This industrial engineered hose is as easy to assemble as a band-on coupling and is perfect for field repairs, minimizing downtime. It can be used for vibration absorption, field transfer, cargo loading, tank transfer, and slurry transport. Ideally, this hose can be kept on hand in frequently used sizes, allowing for immediate on-the-job repairs and installation.

- Rugged, versatile alternative to inflexible steel piping systems
- Absorbs system vibration and saves wear on equipment
- Flexible connection for misaligned hard piping
- Can be cut to length and assembled on-site for immediate installation
- No welding required
- Available with black, red or tan pure gum rubber tube

Construction:
Tube: Black NR/SBR Blend
Reinforcement: Spiral plies of synthetic fabric with wire helix
Cover: Black Corrugated Abrasion Resistant SBR
Standard Lengths: 100 and 40 feet
Temperature Rating: -20°F to 220°F

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	Lining/Tube Thickness (in.)	W.P. (psi)	Vacuum Hg	Min. Bend Ra (in.)	Max Prod. Length/Ft.	Stock Item or Min. Order
2	3.11	1.92	1/4"	150	25"	11 7/8	100'	STOCK
2.5	3.61	3.36	1/4"	150	25"	12 9/16	100'	STOCK
3	4.65	4.80	1/4"	150	25"	13 3/4	100'	STOCK
4	5.38	5.00	1/4"	150	25"	19 5/8	100'	STOCK
5	6.58	7.40	5/16"	150	25"	25 5/8	100'	STOCK
6	7.73	9.20	3/8"	150	25"	29 9/16	100'	STOCK
8	10.02	16.06	3/8"	150	25"	68 7/8	40'	STOCK
10	11.89	16.96	3/8"	150	25"	78 3/4	40'	STOCK
12	13.74	18.65	5/16"	150	25"	98 7/16	40'	STOCK
14	16.36	30.35	3/8"	150	25"	111 1/8	40'	CUSTOM

Unalok Coupling and Gasket

- Made of lightweight A356T6 Aluminum
- Supplied with necessary nuts and bolts for proper mounting
- Sealing gaskets available upon request
- 2" to 12" special order

Couplings: UNALOK Split-Flange Couplings
Packaging: 2" - 6" Coiled or Straight; 8"- 14" Straight

I.D. (in.)	Drilling	Wt./Ft. (lbs.)	Stock Item or Min. Order
2	150 ANSI	3.3	STOCK
3	150 ANSI	5.5	STOCK
4	150 ANSI	6.6	STOCK
5	150 ANSI	7.7	STOCK
6	150 ANSI	8.8	STOCK
8	150 ANSI	13.2	STOCK
10	150 ANSI	25.4	STOCK
12	150 ANSI	30.9	STOCK
14	150 ANSI	35.3	Priced on Request

**Full vacuum rated.
NR/SBR blend tube in stock. Red and Tan Pure Gum are made to order.
Other options include duck and rubber flanges, built-in nipples, rubber-lined nipples and beaded ends.

UNALOK hose is available in many different tube elastomers to handle your most demanding applications including:

Slurries	Phosphates	Feldspar	Bauxite	Uranium
Sand (quartz)	Oxides	Dolomite	Metal powder	Zinc
Sand (foundry)	Ore	Coal	Tailings	Ash
Salt	Industrial waste	Ceramics (gran.)	Wood chips	Nitrates
Polishing agents	Glass (crushed)	Cement	Tungsten	

For easy on-site installation:

UNALOK Hose Assembly

Sand Blast Hose Series 335

Specially compounded tube is formulated to extend service life in sandblasting service. Flexible and kink resistant to reduce operator fatigue. The tube and cover are both static dissipating and the cover is resistant to abrasion and weather.
Abrasion Resistance Value ≤ 70mm3 (DIN ISO 4649).

Construction:
Tube: Black natural rubber blend - Static dissipating
Reinforcement: Multiple textile plies
Cover: Black SBR
Standard Length: 50 feet and 100 feet
Temperature Rating: -25°F to +180°F (-32°C to +82°C)

I.D. (in.)	O.D. (in.)	Plies	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.5	1.06	2	0.33	150	STOCK
0.75	1.50	4	0.64	150	STOCK
1	1.88	4	0.94	150	STOCK
1.25	2.15	4	1.14	150	STOCK
1.5	2.38	4	1.30	150	STOCK
2	2.88	4	1.64	150	STOCK

Concrete and Plaster Hose Series 846

Designed for use in the pumping of plaster, grout, and shotcrete. Specially compounded tube is highly resistant to abrasive materials. The heavy wall resists kinking and the tube/cover is static dissipating. For use as a flexible connection between pumping equipment and hard piping.

Construction:
Tube: Natural rubber blend
Reinforcement: Multiple textile plies
Cover: Black SBR
Standard Length: 50 feet
Temperature Rating: -25°F to +180°F (-32°C to +82°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
1.25	1.90	0.80	800	50'
1.50	2.20	1.14	800	50'
2.0	2.76	1.46	800	50'
2.5	3.31	1.96	800	50'
3.0	4.02	2.39	800	50'

Dry Cement Handling Hose Series 831

Recommended for use on bulk transport trucks in discharge service. Abrasion resistant tube handles dry cement, lime, silica, and other abrasive materials. Static dissipating tube and cover.

Construction:
Tube: Black natural rubber blend
Reinforcement: Multiple textile plies
Cover: Black SBR
Standard Length: 100 feet
Temperature Rating: -25°F to +180°F (-32°C to +82°C)

I.D. (in.)	O.D. (in.)	Tube Thickness (in.)	Wt./Ft. (lbs.)	W.P. (psi)
4	4.46	1/8	1.37	75
4	4.58	3/16	1.82	75
4	4.70	1/4	2.28	75

Hot Tar and Asphalt Hose Series 242

Designed for the transfer of high temperature petroleum-based materials such as tar, asphalt, and hot oils. It is suitable for suction and discharge service on tank trucks, tank cars, or at bulk stations.

Construction:
Tube: Black Nitrile (ARPM Class A ORS)
Reinforcement: Multiple textile plies with helix wire
Cover: Black Neoprene (ARPM Class A ORS)
Standard Length: 100 feet
Temperature Rating: -25°F to 350°F

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
2	2.72	1.77	150	100'
3	3.78	2.82	150	100'
4	4.80	3.82	150	100'

Elephant Trunk Hose Series 313

Used for gravity flow transfer of dry bulk materials. The lightweight tire cord construction provides excellent flexibility. The premium grade tube is abrasion and cut resistant. All-weather cover protects against ozone and abrasion.

Construction:
Tube: SBR
Reinforcement: Polyester cord
Cover: SBR
Length: Up to 60 feet
Temperature Rating: -20 to 180°F

I.D. (in.)	O.D. (in.)	PLY	Wt./Ft. (lbs.)	Stock Item or Min. Order
4	4.45	2	1.71	PRICED ON REQUEST
6	6.45	2	2.52	PRICED ON REQUEST
6.625	7.07	2	2.78	PRICED ON REQUEST
8	8.45	2	3.33	PRICED ON REQUEST
8.625	9.07	2	3.59	PRICED ON REQUEST
10	10.45	2	4.14	PRICED ON REQUEST
10.75	11.2	2	4.45	PRICED ON REQUEST
12	12.45	2	4.95	PRICED ON REQUEST
12.7	13.2	2	5.26	PRICED ON REQUEST
14	14.45	2	5.76	PRICED ON REQUEST
16	16.45	2	6.58	PRICED ON REQUEST
18	18.45	2	7.39	PRICED ON REQUEST
20	20.45	2	8.20	PRICED ON REQUEST
22	22.45	2	9.01	PRICED ON REQUEST
24	24.45	2	9.82	PRICED ON REQUEST
30	30.45	2	12.25	PRICED ON REQUEST

Furnace Door Coolant Hose Series 537

Designed for use in steel mills around blast furnaces as a water coolant hose. A special temperature resistant Nomex cover offers maximum protection against sparks and molten splatter.
*Made to specifications.
MADE IN THE USA

Construction:
Tube: NR/SBR (Non-Conductive)
Reinforcement: Multiple textile plies
Cover: 1-ply Nomex/Fiberglass
Standard Length: 100 feet
Temperature Rating: Cover: up to 600°F

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.5	1.01	0.33	200	PRICED ON REQUEST
0.75	1.25	0.44	200	PRICED ON REQUEST
1	1.66	0.58	200	PRICED ON REQUEST
1.25	1.91	0.76	200	PRICED ON REQUEST
1.5	2.16	0.82	200	PRICED ON REQUEST
2	2.66	1.09	200	PRICED ON REQUEST
2.5	3.14	1.25	200	PRICED ON REQUEST
3	3.61	1.29	200	PRICED ON REQUEST
4	4.64	2.92	200	PRICED ON REQUEST

Furnace Door Coolant Hose Series 538

Designed to convey cooling water to furnace doors in steel mills, glass plants, foundries, or where the hose is subjected to high temperatures, open flame, and splashes of white-hot molten metals or glass.
Hose has a through-the-wall electrical resistance of 1 x 1010 Ω.

Construction:
Tube: White EPDM (Non-Conductive)
Reinforcement: Multiple textile plies
Cover: Heat resistant EPDM, with non-conductive resin-coated dust-free fiberglass cover
Length: 100 feet
Temperature Rating:
Tube: -40°F to 300°F
Cover: -40°F to 1000°F

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.5	0.91	0.36	300	100'
0.75	1.15	0.48	300	100'
1	1.46	0.63	200	100'
1.25	1.81	0.79	150	100'
1.5	2.17	0.91	150	100'
2	2.68	1.16	150	100'
2.5	3.35	1.49	150	100'
3	3.70	1.82	150	100'
4	4.75	2.27	150	100'

OFFSHORE OIL HOSE

All offshore hoses are manufactured to meet or exceed the requirements of the OCIMF Guide to Purchasing, Manufacturing and Testing of the Loading and Discharge Hoses for Offshore Moorings, 4th Edition 1991.

Daytona Type Mainline Submarine Hose Series 297

Electronically continuous or discontinuous (TBA). 300 PSI MAX WP, 1500 PSI MIN BP. Double high-grade Nitrile tube suitable for use with up to 60% aromatic content fuels, multiple plies of high tensile polyester tire cord reinforcement, high grade spring steel helix wire, double cover separated by an orange color ply as a wear indicator.

Cover is resistant to wear, aging, stress, abrasion, weathering, sunlight, oil and saltwater penetration. Built-in, standard weight, seamless, carbon steel nipples with 150lb. ANSI B 16.5 fixed weld neck raised-face flange.

All welded parts are X-rayed and/or mag particle tested. Manufactured with OCIMF certification. Hydro-tested without kerosene testing. Slat packed and with nylon slings for lifting.

All hoses are rated for a maximum working pressure of 300psi with a minimum burst pressure of 1500psi. Underwater weight and negative buoyancy are only guaranteed when full of product or saltwater (per OCIMF 1991). Standard-based submarine hose construction.

I.D. (inch)	O.D. (mm)	Weight (lbs/30ft)	End Weights (lbs)
4	6.93	315	76
6	8.78	566	138
8	11.09	851	194
10	13.71	1252	274
12	15.88	1580	392

Daytona Type Tanker Rail Hose Series 298

Basic hose is constructed as the MAINLINE, but above the Helix Wire additional tapering reinforcement is added extending from each end to a maximum length of 10ft into the body. This provides extra stiffness over the end sections to allow for the hose taking up its normal operational position of a 90 degree bend from the tanker manifold, clear of and over the ship's rail.

Additional standard features include lifting and snubbing lugs, 2 at the TANKER end and 1 at the TAIL end, unless otherwise required by order.
Electrical properties must be stated at inquiry/order stage.
Branding as per OCIMF 1991 indicates the tanker rail end (as well as the standard double lug).

All hoses are rated for a maximum working pressure of 300psi with a minimum burst pressure of 1500psi. Underwater weight and negative buoyancy are only guaranteed when full of product or saltwater (per OCIMF 1991).

I.D. (inch)	O.D. (mm)	Weight (lbs/ft)	Weight (lbs/30ft)	End Weights (lbs)
4	6.93	13.40	402.00	78
6	9.26	21.82	654.60	141
8	11.57	32.08	962.40	198
10	13.98	44.04	1321.20	279
12	16.24	1686.00	1686.00	398

Daytona Type PLEM Hose Series 299

Electrically continuous or discontinuous (TBA). 300 PSI MAX. 1500 PSI MIN BP. Double high-grade Nitrile tube (suitable for use with up to 60% aromatic content fuels), multiple plies of high-tensile polyester tire cord reinforcement, high-grade spring steel helix wire, double cover separated by an orange color ply as a wear indicator.
1/3 of hose from one end with extra reinforcement for the PLEM connection.

All hoses are rated for a maximum working pressure of 300psi with a minimum burst pressure of 1500psi. Underwater weight and negative buoyancy are only guaranteed when full of product or seawater (per OCIMF 1991).

I.D. (inch)	O.D. (mm)	Weight (lbs/ft)	Weight (lbs/30ft)	End Weights (lbs)
4	6.69	11.96	358.80	76
6	9.03	19.91	597.30	138
8	11.67	33.34	1000.20	194
10	13.98	43.80	1314.00	274
12	16.24	56.20	1686.00	392

Dredge Hose Series 902

Custom Engineered Dredge Hose Solutions
Hand-built dredging hose featuring heavy-duty, wear-resistant construction and the finest grades of natural and synthetic materials. Hard-wall and soft-wall complete hose assemblies are available offering flexibility, durability, vibration dampening and stability.

Up to 350 psi WP.
For all connection types:
Sleeve ends, Duck & Rubber flanges with Carbon Steel or Stainless Steel Retaining Rings, Beaded Ends with Carbon Steel or Stainless Steel interlocking Floating Flanges, Built-in Carbon Steel and Stainless Steel Nipples and Carbon Steel and Stainless Steel Flanges.

Dredge Hose Variations:

- SUCTION: Hard suction hose for highly demanding environments featuring custom-blended rubber linings with steel helix wire and multiple linings of synthetic textile reinforcement. Provides for full vacuum, vibration dampening and kink resistance.
- DISCHARGE: Hard-wall and soft-wall configurations designed to your specifications.
- SLEEVE: Multi-ply high tensile synthetic cord for unsurpassed quality and stability. Sleeves will not expand under pressure and offer extreme abrasion-, ozone- and cut-resistance.
- GIMBAL: Gimbal joint suction hoses are used with universal joints to constrain hose movement, eliminating over-stressing. Features embedded welded steel rings for maximum compressive strength and flexibility.

Customization Options:

- Custom blended tube linings
- Custom wear-resistant covers
- Custom lengths
- Custom ends

Available in 2" - 24" Inside Diameter.
Up to 100FT lengths in sizes 2" to 8" I.D.
Up to 50FT lengths in sizes 10" to 24" I.D.

Manufactured in the USA for all dredging applications.

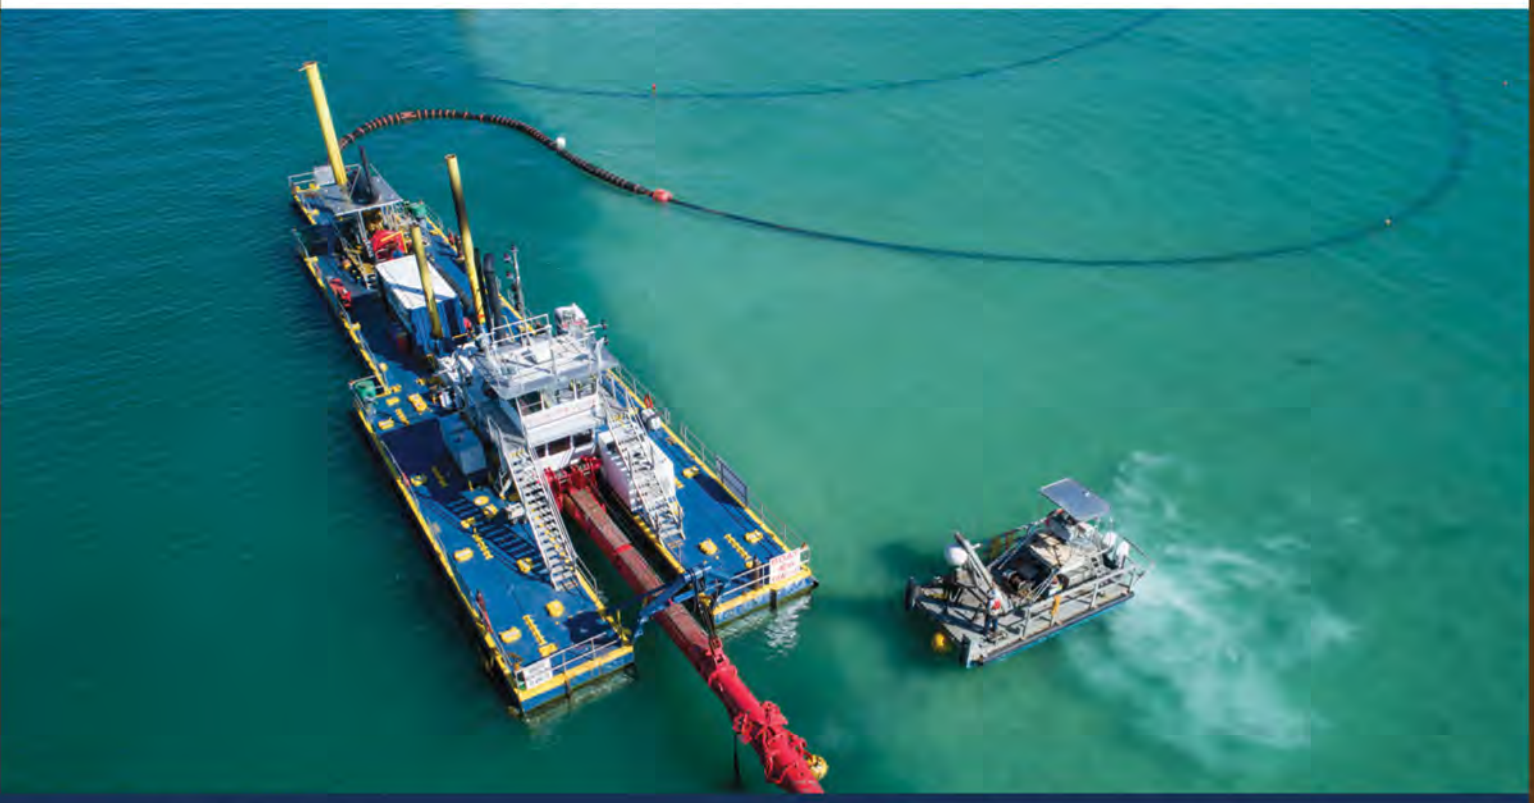

Brewers and Vintners Discharge Hose Series 725

A multi-purpose high pressure sanitary FDA discharge hose, suitable for light vacuum, designed to transfer a wide range of food and beverage products. The smooth white tube will not impart taste or odor. The cover offers excellent oil, weather and abrasion resistance.

Construction:
Tube: White Nitrile (FDA)
Reinforcement: Multiple spiral textile plies
Cover: Orange abrasion resistant Nitrile/PVC
Standard Length: 100 feet
Temperature Rating: -20°F to +220°F (-40°C to +104°C)

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.5	0.89	0.27	225	STOCK
0.75	1.14	0.37	225	STOCK
1	1.49	0.61	225	STOCK
1.25	1.77	0.74	225	STOCK
1.5	2.00	0.84	225	STOCK
2	2.61	1.42	225	STOCK
3	3.77	2.60	225	STOCK

PVC Spring-Wire Suction Hose Series 155

Food and beverage dispensing. Recommended for fluid handling needs in the bottling, canning, dairy and related food-processing areas. Non-toxic formulation conforms to all FDA requirements for safe food and beverage handling. It's also an excellent choice for agricultural irrigation applications.

Construction:
Tube: Clear PVC
Reinforcement: Spring wire
Standard Length: 100 feet
Temperature Rating: -20° to 150°F

I.D. (in.)	O.D. (in.)	Wt./Ft. (lbs.)	W.P. (psi)	Stock Item or Min. Order
0.5	0.81	0.21	150	STOCK
0.625	1.00	0.32	100	STOCK
0.75	1.13	0.36	100	STOCK
1	1.38	0.47	84	STOCK
1.25	1.75	0.56	84	STOCK
1.5	2.00	0.61	84	STOCK
2	2.50	0.70	70	STOCK

Clear PVC Tubing Series 150

Clear, non-toxic, single-layer, FDA formulated PVC tubing for low-pressure, cold water applications. Ideal for drain lines, iceboxes, refrigerators, live wells, bilge pump discharge and freshwater lines. Not to be used for hot water or pressurized applications.

Construction:
Temperature Rating: -10° to 130°F
Description: Smooth, Clear PVC Tube (also available in solid colors)
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)	Weight (lbs/ft)
3/16	4.762	0.313	7.962	65	0.004
1/4	6.350	0.407	10.350	60	0.008
5/16	7.937	0.501	12.737	55	0.025
3/8	9.525	0.564	14.325	55	0.030
1/2	12.700	0.720	18.300	45	0.060
5/8	15.875	0.845	21.475	40	0.075
3/4	19.050	0.970	24.650	35	0.095
1	25.400	1.252	31.800	30	0.270
1-1/8	28.575	1.377	34.975	20	0.290
1-1/4	31.750	1.502	38.150	20	0.310
1-1/2	38.100	1.752	44.500	20	0.680

Polyester Reinforced PVC Tubing

FDA-approved, premium reinforced water hose that is a great choice for a wide range of applications. Non-toxic, tasteless and odorless for food grade applications. It is resistant to saltwater, mild acids, toilet effluent, hot engine water and external abrasion. Constructed with helical wire embedded between two plies of synthetic fabric for maximum flexibility.

Polyester Reinforced PVC Red Tracer Series 162

Temperature Rating: -10° to 130°F
Description: Smooth, Clear PVC Tube with Red Tracer Wire
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

I.D. (inch)	I.D. (mm)	WP (psi)	Weight (lbs/ft)
3/8	9.525	200	0.030
1/2	12.700	200	0.060
5/8	15.875	200	0.075
3/4	19.050	170	0.095
1	25.400	145	0.270
1-1/4	31.750	95	0.310
1-1/2	38.100	90	0.680

Polyester Reinforced Clear PVC Series 163

Temperature Rating: -10° to 130°F
Description: Smooth, Clear PVC Tube
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

I.D. (inch)	I.D. (mm)	WP (psi)	Weight (lbs/ft)
3/8	9.525	265	0.030
1/2	12.700	240	0.060
5/8	15.875	200	0.075
3/4	19.050	170	0.095
1	25.400	150	0.270
1-1/4	31.750	95	0.310
1-1/2	38.100	90	0.680

Polyester Reinforced PVC Blue Tracer Series 164

Temperature Rating: -10° to 130°F
Description: Smooth, Clear PVC Tube with Blue Tracer Wire
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

I.D. (inch)	I.D. (mm)	WP (psi)	Weight (lbs/ft)
3/8	9.525	200	0.030
1/2	12.700	200	0.060
5/8	15.875	200	0.075
3/4	19.050	170	0.095
1	25.400	145	0.270
1-1/2	38.100	90	0.680

MARINE WATER HOSE

Bilge Pump Hose Series M120

This hose is designed to be used with bilge pumps, live well aerators, bilge discharge and sink and shower drains. It is resistant to oil, gasoline, diesel, saltwater, acids and detergents. Its corrugated base material is made up of durable black or white polyethylene and offers extreme flexibility as well as chemical and abrasion resistance. Ends have smooth mounting cuffs for ease of installation.

Temperature: -40° to 200°F
Description: Black or White Polyethylene
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)
5/8	16	0.819	20.81
3/4	19	0.969	24.63
1-1/8	29	1.387	35.23
1-1/4	30	1.473	37.42
1-1/2	40	1.907	48.44

Lightweight Vinyl with Black Helix Series M141

Highly flexible FDA formulated clear PVC tubing with black helix. Used for potable water fill, bilge pump, icebox, sink and shower drains and live well drains. To be used above the water line.

Temperature: -10° to 130°F
Description: Clear PVC with Black Helix
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)	Vacuum Rating (in/HG)	Weight (lbs/ft)
3/4	19.050	0.99	25.146	50	28	0.107
1-1/8	28.575	1.13	28.702	35	26	0.156
1-1/4	31.750	1.61	40.894	50	28	0.321
1-1/2	38.100	1.86	47.244	50	28	0.372

Flex Sanitation Hose Smooth H/D Series M148

Smooth-walled, extra heavy-duty, flexible, multipurpose PVC hose formulated and compounded from FDA materials. Exhibits ultra-low odor permeation. Excellent for all sanitation systems, below water drains, potable water, water intake systems and aerators. Smooth cover permits clamping without cuffs. Recommended double clamps and sealing compounds for below-waterline connections.

Temperature: -10° to 130°F
Description: White FDA Formulated PVC
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)	Vacuum Rating (in/HG)	Weight (lbs/ft)
5/8	15.875	0.86	21.844	130	28	0.158
3/4	19.050	1.01	25.654	130	28	0.203
1	25.400	1.11	28.194	90	28	0.267
1-1/8	28.575	1.27	32.258	80	28	0.294
1-1/4	31.750	1.53	38.862	80	28	0.338
1-1/2	38.100	1.82	46.228	80	28	0.465
2	50.800	2.36	59.944	70	28	0.652

Live Well Hose Series M149

Highly flexible, FDA formulated clear, smooth, PVC tubing with black helix. Used for potable water fill, bilge pump, icebox and sink, shower and live well drains. Resistant to mild chemicals and saltwater.

Temperature: -10° to 130°F
Description: Smooth, Clear PVC with Black Helix
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)	Vacuum Rating (in/HG)	Weight (lbs/ft)
5/8	15.875	0.86	21.844	100	28	0.158
1-1/4	31.750	1.54	39.116	80	28	0.34
1-1/2	38.100	1.82	46.228	80	28	0.465

MARINE CONDUIT HOSE

Electrical Conduit Series M125

A flexible, split-wire conduit designed to provide chafing protection and aesthetic appearance for multi-wire harness and cable routing. Made from a blend of low-density polyethylene resins, it is abrasion and chemical-resistant and flame retardant. Split lengthwise for simple installation. Also available in high-temperature Nylon.

Temperature Rating: -40° to 200°F
Description: Black or White Split Tubing
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

ITEM #	I.D. (inch)	I.D. (mm)
125-0140	1/4"	6.350
125-0380	3/8"	9.525
125-0120	1/2"	12.700
125-0580	5/8"	15.875
125-0340	3/4"	19.050
125-1000	1"	25.400
125-1140	1-1/4"	31.750
125-1120	1-1/2"	38.100
125-2000	2"	50.800

Sternflex Hose Series M127

Premium quality, crush-resistant hose designed as a conduit for containing wires, control cables and hoses between transom and outboard engines. The extremely flexible material is resistant to bilge acids, fuel solutions and UV rays. It can also be used for sink and shower drains. Available in gray, black or white.

Temperature Rating: -40° to 140°F
Description: Gray, Black or White Tubing
Packaging: Bulk Coils, 50' Punch-Out Cartons, Custom Cut Lengths

ITEM #	I.D. (inch)	I.D. (mm)
127-1120	1-1/2"	38.10
127-2000	2"	50.80

MARINE FUEL HOSE

"Flex-Acol" Fuel Hose - USCG/SAE 1527

Excellent resistance to fire, heat, ozone and permeation by alcohol blended gasoline and diesel fuels. Compounded to meet or exceed SAE-J1527 Type A, ISO/DIS 7840 and NMMA standards for fuel feed, fill and vent hoses.

A1 Fuel Hose Series M350

Marine fuel line hose for fuel feed and vent applications on marine gasoline tanks. Meets U.S. Coast Guard and International Marine Certification Institute requirements for Type A1 service. Spiral synthetic yarn reinforcement. Synthetic inner rubber tube provides for high oil resistance.

Construction:
Tube: Black Nitrile Synthetic Rubber ARPM Class A
Cover: Black Synthetic Rubber
Reinforcement: Spiral Synthetic Yarn
Temperature Rating: 0° to 115°F
Standard Length: 100 Ft

ITEM #	I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)	Vacuum Rating (in/HG)	Weight (lbs/ft)
350-0140	1/4"	6.40	0.65	16.5	49	N/A	0.17
350-0560	5/16"	7.90	0.71	18.0	49	N/A	0.19
350-0380	3/8"	9.50	0.78	19.8	49	N/A	0.2
350-0120	1/2"	12.70	0.89	23.0	36	N/A	0.26
350-0580	5/8"	15.90	1.06	25.8	36	N/A	0.35

A2 Fuel Hose Series M360

Marine fuel fill hose for marine gasoline tanks. Provides connection from a boat's fuel fill port to its fuel tank. Meets Requirements for Type A2 service. Spiral synthetic yarn reinforcement. Synthetic inner rubber tube provides for high oil resistance.

Construction:
Tube: Black Nitrile (ARPM Class A ORS)
Cover: Black Synthetic Rubber
Reinforcement: Multiple textile plies with dual helix wire
Temperature Rating: -20° to 180°F
Standard Length: 100 Ft

ITEM #	I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)	Bend Radius (in)	Weight (lbs/ft)
360-1000	1	31.80	1.38	35.05	100	2.5	0.43
360-1140	1-1/4	38.10	1.65	43.20	100	3.0	0.59
360-1120	1-1/2	47.60	1.86	47.10	100	4.0	0.78
360-1780	1-7/8	50.80	2.30	58.40	100	4.5	0.95
360-2000	2	50.80	2.43	61.70	50	5.0	1.13
360-2340	2-3/4	69.90	69.90	71.10	50	5.5	1.19

CERTIFIED WET MARINE EXHAUST HOSE

Certified Marine Softwall Wet Exhaust Hose
Series M110/200

Certified wet exhaust, heavy-wall reinforcement with multiple plies of synthetic cord. Designed for engine water circulation, heat exchanger, heavy-duty discharge lines and straight marine wet exhaust connections. Meets or exceeds USCG, ABYC, and SAE J2006 R1 Standards for wet exhaust service. Recommended for short, straight connections.

Construction:
Tube: Black EPDM Blend
Cover: Black EPDM Blend
Reinforcement: Multiple textile plies
Temperature Rating: -20° to 200°F

ITEM #	I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)
110-0120	1/2	13.0	0.87	22.0	169
110-0580	5/8	16.0	1.02	26.0	169
110-0340	3/4	19.0	1.14	29.0	169
110-0780	7/8	22.0	1.26	32.0	102
110-1000	1	25.0	1.36	34.5	102
100-1180	1-1/8	29.0	1.54	39.0	97
110-1140	1-1/4	32.0	1.69	43.0	97
110-1560	1-5/16	33.0	1.69	43.0	97
110-1380	1-3/8	35.0	1.81	46.0	97
200-1120	1-1/2	38.0	1.93	49.0	68
200-1580	1-5/8	41.0	2.05	52.0	68
200-1340	1-3/4	45.0	2.20	56.0	63
200-1780	1-7/8	48.0	2.32	59.0	58
200-2000	2	51.0	2.44	62.0	58
200-2140	2-1/4	57.0	2.68	68.0	58
200-2380	2-3/8	60.0	2.80	71.0	87
200-2120	2-1/2	64.0	2.91	74.0	87
200-2580	2-5/8	67.0	3.03	77.0	87
200-2780	2-7/8	73.0	3.27	83.0	77
200-3000	3	76.0	3.46	88.0	77
200-3184	3-1/8	79.0	3.58	91.0	73
200-3124	3-1/2	89.0	3.98	101.0	63
200-3344	3-3/4	95.0	4.17	106.0	63
200-4004	4	102.0	4.45	113.0	58
200-4184	4-1/8	105.0	4.57	116.0	58
200-4124	4-1/2	114.0	4.92	125.0	63
200-5004	5	127.0	5.55	141.0	77
200-5124	5-1/2	140.0	6.06	154.0	68
200-6004	6	152.0	6.69	170.0	58
200-6584	6-5/8	168.0	7.32	186.0	58
200-8004	8	203.0	8.74	222.0	48

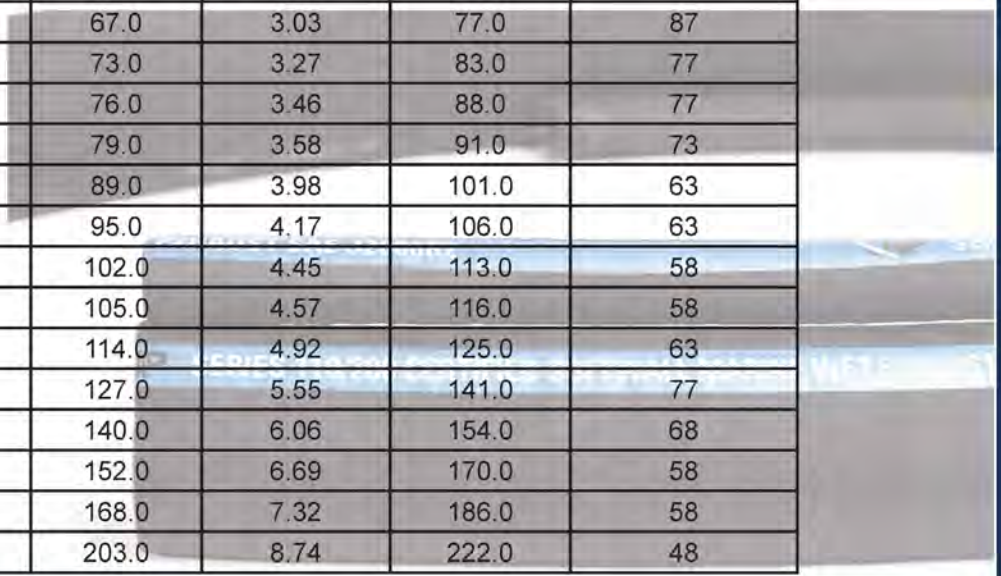

Certified Marine Hardwall Wet Exhaust Hose Series M100/250

Certified wet exhaust, heavy wall, helical wire reinforcement between 4 plies of rayon fabric. Compounded to resist engine heat, exhaust fumes, ozone, mild acids, toilet effluent, saltwater and abrasion. Meets or exceeds USCG, ABYC, and SAE J2006 R2 Standards for wet exhaust service.

Construction:
Tube: Black EPDM blend
Cover: Black EPDM blend
Reinforcement: Multiple textile plies with dual wire helix
Temperature Rating: -20° to 200°F

ITEM #	I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)
100-0120	1/2	13.0	0.83	21.0	203
100-0580	5/8	15.0	0.94	24.0	169
100-0340	3/4	19.0	1.06	27.0	135
100-0780	7/8	22.0	1.18	30.0	135
100-1000	1	25.0	1.35	34.4	102
100-1180	1-1/8	29.0	1.50	38.0	97
100-1140	1-1/4	32.0	1.61	41.0	97
100-1560	1-5/16	33.0	1.65	42.0	97
100-1380	1-3/8	35.0	1.73	44.0	82
250-1120	1-1/2	38.0	1.93	49.0	82
250-1580	1-5/8	41.0	2.05	52.0	68
250-1340	1-3/4	45.0	2.20	56.0	58
250-1780	1-7/8	48.0	2.32	59.0	53
250-2000	2	51.0	2.44	62.0	68
250-2180	2-1/8	54.0	2.60	66.0	63
250-2140	2-1/4	57.0	2.72	69.0	63
250-2380	2-3/8	60.0	2.80	71.0	53
250-2120	2-1/2	63.0	2.87	73.0	87
250-2580	2-5/8	67.0	3.03	77.0	87
250-2340	2-3/4	70.0	3.15	80.0	77
250-2780	2-7/8	73.0	3.27	83.0	77
250-3000	3	76.0	3.46	88.0	77
250-3180	3-1/8	79.0	3.58	91.0	77
250-3120	3-1/2	89.0	3.98	101.0	63
250-4000	4	102.0	4.65	118.0	58
250-4120	4-1/2	114.0	5.12	130.0	77
250-5000	5	127.0	5.63	143.0	77
250-6000	6	152.0	6.65	169.0	63
250-8000	8	203.0	8.74	222.0	58
250-8584	8-5/8	219.0	9.37	238.0	48

Certified Marine Hardwall Corrugated Wet Exhaust Hose Series M252

Compounded to resist engine heat, exhaust fumes, ozone, mild acids, toilet effluent, saltwater and abrasion. Meets or exceeds USCG, ABYC, and SAE J2006 R2 Standards for wet exhaust service. Designed for severe-bend applications.

Construction:
Tube: Black EPDM Blend
Cover: Black EPDM Blend (Corrugated)
Reinforcement: Multiple textile plies with dual helix wire
Temperature: -20° to 200°F

ITEM #	I.D. (inch)	I.D. (mm)	O.D. (inch)	O.D. (mm)	WP (psi)	Vacuum Rating (in/HG)
252-1120	1-1/2	38.0	1.89	48.0	68	29
252-1580	1-5/8	41.0	2.01	51.0	58	29
252-1340	1-3/4	45.0	2.20	56.0	58	29
252-1780	1-7/8	48.0	2.28	58.0	58	29
252-2000	2	51.0	2.40	61.0	58	29
252-2120	2-1/2	63.0	2.87	73.0	87	29
252-2780	2-7/8	73.0	3.27	83.0	73	29
252-3000	3	76.0	3.46	88.0	73	29
252-3120	3-1/2	90.0	4.02	102.0	63	29
252-4000	4	102.0	4.49	114.0	58	29
252-5000	5	127.0	5.55	141.0	73	29
252-8000	8	203.0	8.70	221.0	63	27

Straight Silicone Hose Series BSIL

4-Ply, polyester-reinforced silicone hose. SAEJ20 Compliant. Does not conduct electricity. Functions well in both extreme hot and cold temperatures. Highly resistant to chemical corrosion and friction. Excellent resistance to ozone and UV light. Commonly used in for air intake connections, supercharger connections, cold side turbo and inter-cooler connections, radiator or heater core connections or where high temperatures or extreme working conditions exist. Used across multiple industries including marine, automotive, agriculture, medical, and aerospace. Stocked in smooth blue exterior with red interior. Black and red available upon request. Meets and exceeds all performance and physical criteria of SAE J20 R1, SAE J20 R1 H.T. Class A, TMC RP303B Grade I and Grade II, Mil Spec A-A-52426 and various other heavy-duty OEM specifications.

Description: Smooth Blue Exterior
Reinforcement: 4-Ply, Polyester
Temperature: -65° to 350°F
Length: 3 or 12 foot sticks

ITEM #	I.D. (inch)	Length (ft)
BSIL-4P01	1	3 or 12
BSIL-4P0125	1-1/4	3 or 12
BSIL-4P015	1-1/2	3 or 12
BSIL-4P175	1-3/4	3 or 12
BSIL-4P02	2	3 or 12
BSIL-4P225	2-1/4	3 or 12
BSIL-4P25	2-1/2	3 or 12

Additional Silicone Products Available

- Hump Hose
- Elbow Hose
- Heater Hose
- Vacuum Hose

MARINE HOSE ACCESSORIES

T-Bolt Exhaust Hose Clamps Series 720

Marine grade 303 Stainless Steel hose clamps designed to assure proper clamping of large diameter marine exhaust hoses. All clamps are equipped with a nylon insert lock nut.

Size: 1" - 16" Standard Hose I.D.
Description: 303 Stainless Steel
Packaging: 10 Per Package.

Clamp Size (in.)	Minimum O.D. (in.)	Maximum O.D. (in.)
1-1/2	1-1/2	2-1/8
2	2-1/4	2-5/8
2-1/2	2-5/8	3-1/4
3	3	3-1/2
3-1/2	3-1/2	4-1/8
4	4-1/8	4-3/4
4-1/2	4-3/4	5-1/4
5	5-1/4	5-7/8
5-1/2	5-5/8	6-1/4
6	6-3/8	7-1/8
8	8-1/4	9-1/8
10	10-1/2	11
12	12	12-3/4

UIP International, Inc

Where Quality is the Standard

Texas:
6002 Griggs Road
Houston, TX 77023
713-357-3017

Florida (Headquarters):
1350 S. Dixie Highway East
Pompano Beach, FL 33060
954-785-3539

1-800-257-2467
www.uipintl.com
sales@uipintl.com

HOSE SAFETY INSTITUTE Member .org

FLUID SEALING ASSOCIATION FSA

NAHAD MEMBER
THE ASSOCIATION FOR HOSE AND ACCESSORIES DISTRIBUTION

ASTM

UL

SAE

NMMA

ISO 9001:2015